

Epson LQ-350 dot matrix printer 360 x 180 DPI 347 cps

Brand : Epson

Article code: C11CC25001

Product name : LQ-350


Epson LQ-350. Maximum print speed: 347 cps, Maximum resolution: 360 x 180 DPI, Maximum print speed (draft): 260 cps. Paper tray media types: Envelopes, Labels, Roll. Product color: Black, Grey, Buffer size: 128 KB, Sound pressure level (printing): 53 dB. Standard interfaces: Parallel, Serial, USB 2.0. Print head: 24-pin, Print direction: Bidirectional, Print head life: 400 million characters



Printing		Operational conditions	
Maximum resolution *	360 x 180 DPI	Operating relative humidity (H-H)	10 - 80%
Maximum printing width (columns) *	80	System requirements	
Colour *	✗	Windows operating systems supported	Windows 2000, Windows 7, Windows 8, Windows Vista, Windows XP
Maximum print speed *	347 cps	Bundled software	Epson Status Monitor
Maximum print speed (draft)	260 cps	Weight & dimensions	
Maximum print speed (LQ)	86 cps	Width	348 mm
Character pitch	10 cpi	Depth	275 mm
Maximum number of copies	4 copies	Height	154 mm
Paper handling		Weight	4.1 kg
Paper tray media types	Envelopes, Labels, Roll	Packaging data	
Features		Quantity per pack	1 pc(s)
Product colour *	Black, Grey	Package width	220 mm
Buffer size *	128 KB	Package depth	425 mm
Sound pressure level (printing) *	53 dB	Package height	360 mm
Page description languages *	Epson ESC/P2	Package weight	5.11 g
Country of origin	Indonesia	Other features	
Ports & interfaces		Connectivity technology	Wired
Standard interfaces *	Parallel, Serial, USB 2.0	Print technology	Dot matrix
Endurance		Needles	24
Print head *	24-pin	Logistics data	
Print direction	Bidirectional	Products per pallet	45 pc(s)
Print head life	400 million characters	Pallet gross length	120 cm
Ribbon life (black, draft)	3 million characters	Pallet gross width	80 cm
Ribbon life (black, LQ)	2.5 million characters	Pallet gross height	2.13 m
Mean time between failures (MTBF)	10000 h	Products per pallet layer	5 pc(s)
Power		Products per pallet layer (UK)	6 pc(s)
Power consumption (typical)	22 W	Products per pallet (UK)	54 pc(s)
AC input voltage	200 - 240 V	Pallet length (UK)	120 cm
Operational conditions		Pallet width (UK)	100 cm
Operating temperature (T-T)	5 - 35 °C	Pallet height (UK)	2.13 m

Logistics data

Harmonized System (HS) code	84433210
-----------------------------	----------

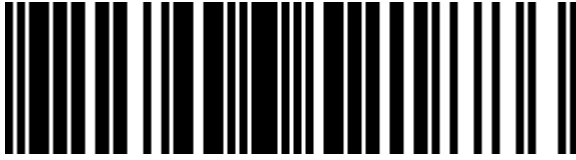

8715946521886

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 06-DEC-2024. Prints or copies of Information are only valid on the printed Publication date